



ATV NEW SERIES

Filter fans 26 m³/hr

ATV 11



Features	Unit	ATV1000	ATV1100	ATV1101	ATV1112	ATV1124
Air flow rate (free blow)	m ³ /h	-	26 (30)		26	
Air flow rate with exit filter	m ³ /h	-	15 (18)		15	
Power supply	V/Hz	-	230 / 50-60	115 / 50-60	12DC	24DC
Dimensions HxWxD	mm	114x114x27	114x114x73		114x114x60	
Power consumption	W	-	13 (12)		3	4
Current consumption	A	-	0.10 (0.08)	0.14 (0.12)	0.25	0.16
Overcurrent protection	-	-	impedance			
Electrical connection	-	-	3-poles spring terminals *		2-poles spring terminals *	
Duty cycle	-	-	100%			
Operating temperature	°C (°F)	-10 / +70 (+14/+158)				
Protection degree / Class	-	IP54	IP54 / Class I			
Noise level	dB(A)	-	30 (35)		35	
Flow direction	-	-	reversible, default factory setting outside-in			
Bearing	-	-	ball			
Filter mat EN779	-	G2	G2			
Service life (at 40°C)	hr	-	50 000			
Material	-	ABS UL94V-0 color RAL7035				
Wall thickness	mm	1.2 - 2.4				
Gasket	-	foam seal gasket				
Weight (with packaging)	kg	0.09(0.11)	0.41(0.46)		0.20(0.25)	
Package dimensions H x W x D	mm	125x125x35	125x125x80			
Mounting	-	fast clip-on				
Conformity/Certifications	-	CE				


* 0.5-2.5mm²

Versions

UL File n. E301228 -code ending	U
EMC-code ending	M

Accessories

Filter mat, standard type	ATVF1
Filter mat, high efficiency	ATVF1X
Thermostat 0-60°C, NO contact	THV2
Fan speed controller	FSC
Hood for IP55	CUFF10B

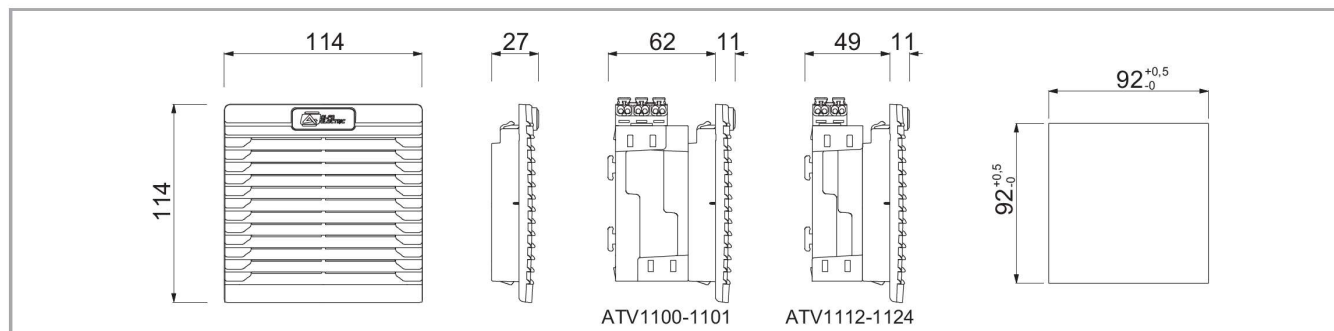

Specifications, values and drawings are subject to change without notice.