

Adapter

PGxxMxxPA


Adapter	Polyamide PA6 GF30
External thread	Pg as per DIN 40430
Internal thread	metric, as per EN 60423



Properties


Temperature range	-30 °C +100 °C
Protection grade	dependent on the combination with other components

- Adapter from pg to metric threaded holes

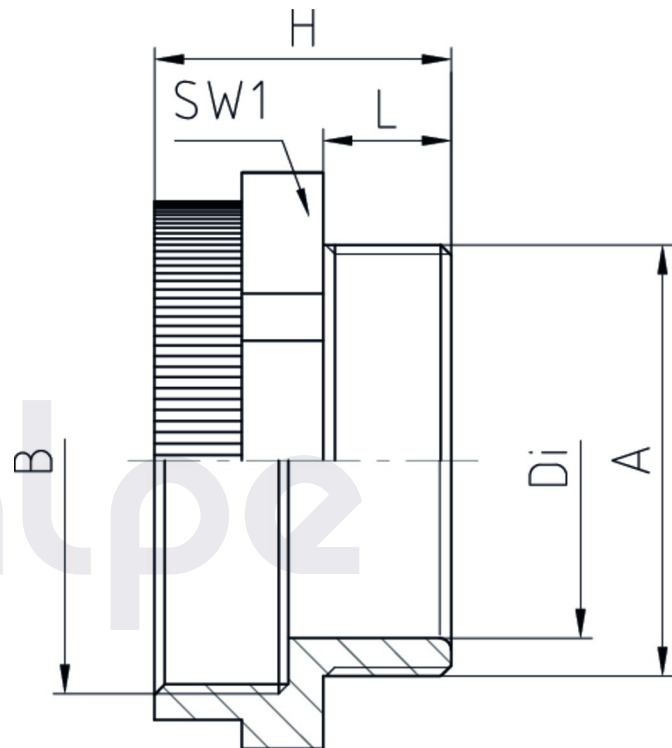


Features

 RAL 7035

A	B	L	SW1	H	Di		Part No.
Pg 9	M12x1,5	8	19	20	10,5	100	PG9M12PA
Pg 9	M16x1,5	8	20	20	10,5	100	PG9M16PA
Pg 9	M20x1,5	8	24	20	10,5	100	PG9M20PA
Pg 11	M16x1,5	8	22	20	13,5	100	PG11M16PA
Pg 11	M20x1,5	8	24	20	13,5	100	PG11M20PA
Pg 13,5	M16x1,5	9	24	21	15	100	PG13M16PA
Pg 13,5	M20x1,5	9	24	21	15	100	PG13M20PA
Pg 13,5	M25x1,5	9	30	21,5	15	100	PG13M25PA



Jacob

A	B	L	SW1	H	Di		Part No.
Pg 16	M20x1,5	10	27	22	17,5	100	PG16M20PA
Pg 16	M25x1,5	10	30	22,5	17,5	50	PG16M25PA
Pg 21	M25x1,5	11	33	23,5	22,5	50	PG21M25PA
Pg 21	M32x1,5	11	37	25,5	22,5	50	PG21M32PA
Pg 29	M32x1,5	11	42	25,5	30,5	50	PG29M32PA
Pg 29	M40x1,5	11	45	25,5	30,5	50	PG29M40PA

calpe