

TECHNICAL DATA SHEET - INTERACTIVE PDF

# Cable Tie, standard

## TY25, TY253, TY28 series 50 lbs (222 N)



Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle.

### Certifications / Standards:



**3-Part Specification: 26 05 84**  
**End User Tools**

#### Features:

- 316 stainless steel barb is corrosion resistant and helps provide greater longevity

#### Recommended Installation Tool:

- ERG50 / WT199 (MS90387-1)
  - Setting 6-8

#### Conforms to:

- Railway Ties (-RW) conforms to EN 45545-2

#### Materials/Finishes:

- Natural Polyamide (Nylon 6.6)
- UV-resistant black (Nylon 6.6)
- Milspec UV-resistant black (Nylon 6.6)

#### Ratings:


- Flammability: UL94 V-2
- Plenum: AH-2
- UL Type 21S
- Black: UV Resistant

**Cable ties:**  
TY25 series

**Product selection**

Part no. standard GID no.	Color	Min. Bundle diameter inch (mm)	Max. Bundle diameter inch (mm)	Tensile strength lbs. (N)	A	B	C	D	E	Minimum Operating Temp. °F (°C)	Maximum Operating Temp. °F (°C)	Minimum Installation Temp. °F (°C)
					inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)			
TY25M 7TAG009210R0042	Natural	0.12 (3)	1.89 (48)	50 (222)	7.2 (183)	0.19 (4.9)	0.22 (5.6)	3.2 (8.0)	0.05 (1.3)	-76 (-60)	185 (85)	-4 (-20)
TY525M 7TAG009170R0000	Natural											
TYB25M 7TCG009450R0193	Natural											
TY25MX 7TAG009210R0045	UV Black	0.12 (3)	1.89 (48)	50 (222)	7.2 (183)	0.19 (4.9)	0.22 (5.6)	3.2 (8.0)	0.05 (1.3)	-76 (-60)	221 (105)	-22 (-30)
TY525MX 7TAG009170R0002	UV Black											
TYB25MX 7TCG009450R0198	UV Black											
TY25M-1 7TAG009270R0010	Brown	0.12 (3)	1.89 (48)	50 (222)	7.2 (183)	0.19 (4.9)	0.22 (5.6)	3.2 (8.0)	0.05 (1.3)	-76 (-60)	185 (85)	-4 (-20)
TY25M-2 7TAG009270R0011	Red											
TY525M-2 7TAG009270R0032	Red											
TYB25M-2 7TCG009450R0195	Red											
TY25M-3 7TAG009270R0013	Orange											
TY25M-4 7TAG009270R0014	Yellow											
TY25M-5 7TAG009270R0015	Green											
TYB25M-5 7TCG009450R0196	Green											
TY25M-6 7TAG009270R0016	Blue											
TYB25M-6 7TCG009450R0197	Blue											
TY25M-7 7TAG009270R0017	Purple											
TY25M-8 7TAG009270R0018	Gray											
TY525M-CLRS 7TAG009270R0037	Multiple Color											
TY525MR 7TCG009200R0021	Natural	0.12 (3)	1.89 (48)	50 (222)	7.3 (186)	0.18 (4.6)	0.22 (5.6)	0.33 (8.5)	0.04 (1.1)	-76 (-60)	185 (85)	-4 (-20)
TY525MXR 7TCG009200R0023	UV Black	0.12 (3)	1.89 (48)	50 (222)	7.3 (186)	0.18 (4.6)	0.22 (5.6)	0.33 (8.5)	0.04 (1.1)	-76 (-60)	221 (105)	-22 (-30)
TY25MX-RW* 7TCG009210R0085	Railway UV Black											
TY525MXR-RW* 7TCG009210R0088	Railway UV Black											

Note: Product must be installed in accordance with applicable national and local electrical codes.  
\* Not all certifications apply.

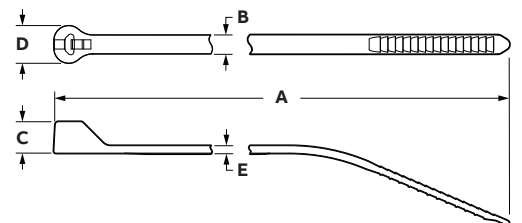


**Cable ties:**  
TY253 series

**Product selection**

Part no. standard GID no.	Color	Min. Bundle diameter inch (mm)	Max. Bundle diameter inch (mm)	Tensile strength lbs. (N)	A	B	C	D	E	Minimum Operating Temp. °F (°C)	Maximum Operating Temp. °F (°C)	Minimum Installation Temp. °F (°C)
					inch (mm)	inch (mm)	inch (mm)	inch (mm)	inch (mm)			
TY253M 7TAG009220R0001	Natural	0.12 (3)	3.07 (78)	50 (222)	11.6 (295)	0.19 (4.9)	0.22 (5.6)	0.31 (7.9)	0.05 (1.3)	-76 (-60)	185 (85)	-4 (-20)
TY5253M 7TAG009180R0006	Natural											
TY5253MR 7TAG009000R0224	Natural											
TY253M100 7TAG009240R0011	Natural											
TY253M-9 7TAG009000R0223	Milspec Natural	0.12 (1.5)	3.07 (78)	50 (222)	11.6 (295)	0.19 (4.9)	0.22 (5.6)	0.31 (7.9)	0.05 (1.3)	-76 (-60)	185 (85)	-4 (-20)
TY5253M-9 7TAG009170R0013	Milspec Natural											
TY253M-1 7TAG009270R0002	Brown	0.12 (3)	3.07 (78)	50 (222)	11.6 (295)	0.19 (4.9)	0.22 (5.6)	0.31 (7.9)	0.05 (1.3)	-76 (-60)	185 (85)	-4 (-20)
TY253M-2 7TAG009270R0003	Red											
TY5253M-2 7TAG009270R0030	Red											
TY253M-3 7TAG009270R0004	Orange											
TY253M4 7TAG009270R0009	Yellow											
TY253M-5 7TAG009270R0005	Green											
TY253M-6 7TAG009270R0006	Blue											
TY253M-7 7TAG009270R0007	Purple											
TY253M-8 7TAG009270R0008	Gray											
TY253M-10 7TAG009270R0054	White											
"TY253MX 7TAG009220R0003"	UV Black	0.12 (3)	3.07 (78)	50 (222)	11.6 (295)	0.19 (4.9)	0.22 (5.6)	0.31 (7.9)	0.05 (1.3)	-76 (-60)	221 (105)	-22 (-30)
"TY5253MX 7TAG009180R0007"	UV Black											
"TY253MX100 7TAG009000R0224"	UV Black											
TY5253MXR 7TCG009200R0019	UV Black											
TY253MX-RW* 7TCG009220R0011	Railway UV Black											
TY5253MXR-RW* 7TCG009220R0012	Railway UV Black											
TY253MX-0 7TAG009210R0094 MS3367-7-0	Milspec UV Black	0.12 (1.5)	3.07 (78)	50 (222)	11.6 (295)	0.19 (4.9)	0.22 (5.6)	0.31 (7.9)	0.05 (1.3)	-76 (-60)	185 (85)	32 (0)
TY5253MX-0 7TAG009170R0012 MS3367-7-0	Milspec UV Black											

Note: Product must be installed in accordance with applicable national and local electrical codes.  
\* Not all certifications apply.

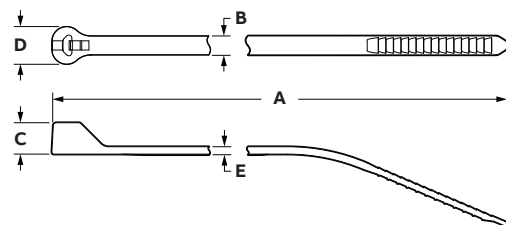


**Cable ties:**  
TY28 series

**Product selection**

Part no. standard GID no.	Color	Min. Bundle diameter inch (mm)	Max. Bundle diameter inch (mm)	Tensile strength lbs. (N)	A inch (mm) ±0.160 (4.0)	B inch (mm) ±0.020 (0.51)	C inch (mm) ±0.020 (0.51)	D inch (mm) ±0.020 (0.51)	E inch (mm) ±0.010 (0.25)	Minimum Operating Temp. °F (°C)	Maximum Operating Temp. °F (°C)	Minimum Installation Temp. °F (°C)
TY28M 7TAG009210R0048	Natural	0.12 (3.0)	4.02 (102)	50 (222)	14.2 (36.1)	0.19 (4.8)	0.22 (5.6)	0.32 (8.1)	0.05 (1.3)	-76 (-60)	185 (85)	-4 (-20)
TY528M 7TAG009170R0003	Natural											
TY528MR 7TCG009450R0183	Natural											
TY28M-100 7TAG009200R0016	Natural											
TY28M-1 7TAG009270R0020	Brown											
TY28M-2 7TAG009270R0021	Red											
TY28M-3 7TAG009270R0022	Orange											
TY28M-4 7TAG009270R0023	Yellow											
TY28M-5 7TAG009270R0024	Green											
TY28M-6 7TAG009270R0025	Blue											
TY28M-7 7TAG009270R0026	Purple											
TY28M-8 7TAG009270R0027	Gray											
TY28MX 7TAG009210R0050	UV Black	0.12 (3.0)	4.02 (102)	50 (222)	14.2 (36.1)	0.19 (4.8)	0.22 (5.6)	0.32 (8.1)	0.05 (1.3)	-76 (-60)	221 (105)	-22 (-30)
TY528MX 7TAG009170R0004	UV Black											
TY528MXR 7TCG009200R0025	UV Black											
TY28MX-100 7TAG009190R0038	UV Black											
TY28MX-0 7TAG009210R0093 MS3367-2-0	Milspec UV Black	0.12 (1.5)	4.02 (102)	50 (222)	14.2 (36.1)	0.19 (4.8)	0.22 (5.6)	0.32 (8.1)	0.05 (1.3)	-76 (-60)	185 (85)	32 (0)
TY528MX-0 7TAG009170R0010 MS3367-2-0	Milspec UV Black											
TY28MX-RW* 7TCG009210R0086	Railway UV Black											
TY528MXR-RW* 7TCG009210R0089	Railway UV Black											

Note: Product must be installed in accordance with applicable national and local electrical codes.  
\* Not all certifications apply.

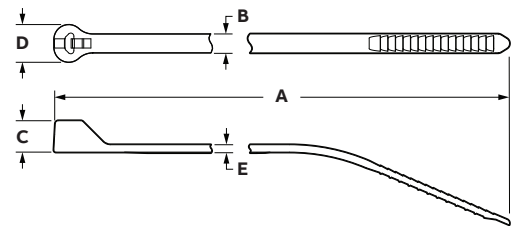

tnb.abb.com (US/Latin America)  
tnb.ca.abb.com (Canada)  
abb.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction – in whole or in part – is forbidden without prior written consent of ABB. © 2021 ABB Installation Products Inc. and/or its related companies. All Rights Reserved.