



SOFT STARTER, ADXNF... TYPE, NFC VERSION, WITH INTEGRATED BYPASS RELAY.
AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A

ADXNF006



Product designation
Product type designation
Motor type

Soft starter NFC
ADXNF
Asynchronous
three phase

Electrical features

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	208...600VAC
auxiliary supply voltage (Us)		100...240VAC
Rated frequency	Hz	50/60

Rated starter current Ie	A	6
--------------------------	---	---

Rated motor power

IEC ratings (T≤40°C)

230VAC	kW	1.1
400VAC	kW	2.2
500VAC	KW	3

UL ratings (T≤40°C)

220-240VAC	HP	1.5
380-415VAC	HP	2
440-480VAC	HP	3
550-600VAC	HP	5

Number of controlled phases	Nr.	2
-----------------------------	-----	---

Built-in bypass		Yes
-----------------	--	-----

Cooling System		Natural or forced (optional)
----------------	--	------------------------------

Rated insulation voltage Ui	V	600
-----------------------------	---	-----

Programming interface

Display		No
---------	--	----

Programming with NFC technology		Yes
---------------------------------	--	-----

Optical port		No
--------------	--	----

Startup and stop settings

Startup method		Voltage ramp
----------------	--	--------------

Stop method		Voltage ramp or free-wheel stop
-------------	--	---------------------------------

Acceleration ramp	s	1-20
-------------------	---	------

Deceleration ramp	s	0-20
-------------------	---	------

Startup voltage	%	30-80
-----------------	---	-------

Protections

Power supply Protection		No power line, phase loss, frequency out of limits, minimum and maximum voltage and phase sequence
-------------------------	--	--

Starter protection		Overtemperature
--------------------	--	-----------------



Functions

Built-in bypass	2
Built-in display and keypad	Yes
Languages	No
View measurements	No
Torque control	No
Adjustable current limit	No
Dynamic braking	No
Kick Start function	No
Motor overload electronic protection	No
Motor protection PTC input	No
Protection against phase loss	No
Protection against phase inversion	Yes
Protection against locked rotor	Yes
Protection against thyristor overtemperature	No
Protection against low load	Yes
Programmable alarm	No
Digital inputs	Yes
Analog inputs	Yes
Digital outputs	No
Analog output	Yes
Monitoring communication	No
Optical port for programming	Optional
Event log	No
Motor hour counter	No
Startup counter	No
Clock calendar	No
Remote external keypad	No
Plug-in version	No

Input and Output

Digital inputs	Number of digital input	Nr.	1
	Digital input type		Volt-free contact
	Digital input functions		Motor start
Digital outputs	Number of digital output	Nr.	2
	Digital output arrangement		2 NO contacts with the same common, 5A 250VAC AC1 - 5A 30 VDC
	Digital output functions		Programmable: line contactor (Run), TOR (Top Of Ramp), alarm

Communication interfaces

Communication interface	NFC
-------------------------	-----

Ambient conditions

Temperature	Operating temperature	min	°C	-20
		max	°C	+60°C (with current derating >40°C)



SOFT STARTER, ADXNF... TYPE, NFC VERSION, WITH INTEGRATED BYPASS RELAY.
AUXILIARY SUPPLY 100...240VAC. RATED OPERATIONAL VOLTAGE 208...600VAC, 6A

Storage temperature

min	°C	-30
max	°C	+80

Max altitude

m 1000 without derating of the starter current

Relative humidity

% <80%

Pollution degree

2

Installation category

III

Housing

Mounting

Screw-fixing or 35mm DIN rail (IEC/EN/BS 60715)

IP degree of protection

IP20


Dimensions (W x H x D)

mm 45 x 139 x 113.4

Weight

Kg 0.45

Dimensions [mm (in)]

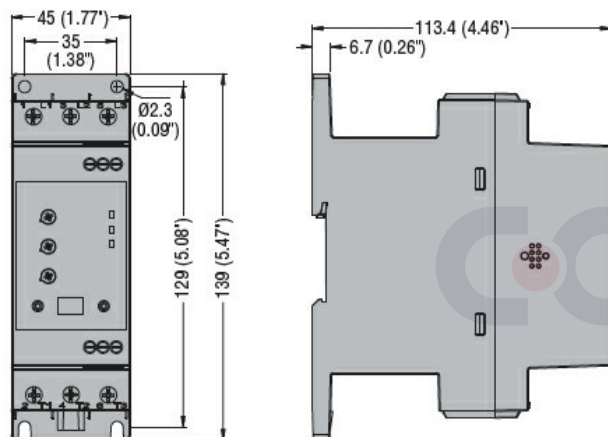

Certifications and compliance

Compliance

CSA C22.2 n° 60947-4-2

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

EAC

RCM (pending)

ETIM classification

ETIM 8.0

EC000640 - Soft starter